

Pro - high precision design



APPLICATION

For counter-clamping workpieces on turning and grinding machines for highest demands.

TYPE



High precision design.

CUSTOMER BENEFITS

- Maximum concentricity deviation of **0.003 mm** for maximum precision
- Lifetime lubrication for minimum required maintenance
- Proven 3-fold bearing for high axial and radial load

TECHNICAL FEATURES

- Body hardened and ground
- Tip angle 60°

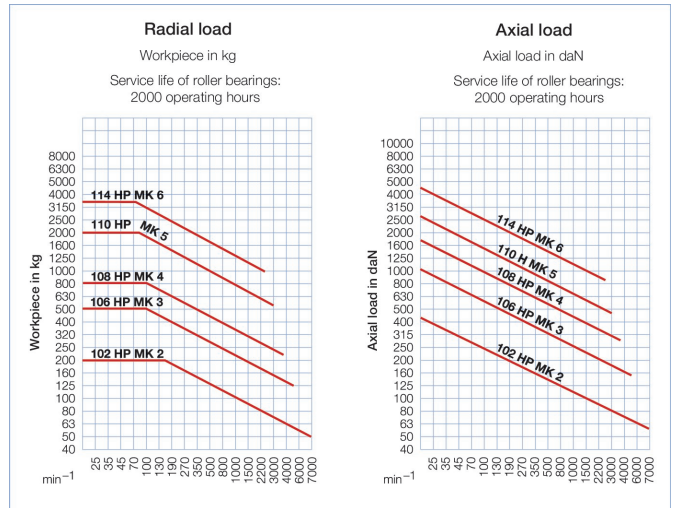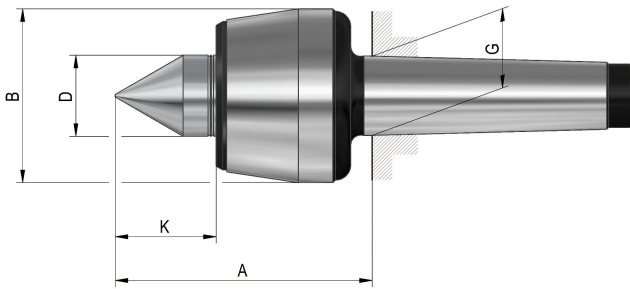

A06 HP Pro precision version body hardened and ground - tip angle 60°

Item no.	082392	318227	082394	082395	1263871
Mount MT	2	3	4	5	6
Size	102	106	108	110	114
A mm	65	82	102.5	129	151.6
B mm	43	55	68.5	88.5	102.5
D mm	20	25	32	40	50
G mm	17.78	23.825	31.267	44.399	63.348
K mm	24	30.5	40	49.5	56.9
Weight approx. g	500	1300	2300	4700	8761
Workpiece weight max. kg	200	500	800	2000	3500
Concentricity deviation max. mm	0.003	0.003	0.003	0.003	0.003
Speed max. min ⁻¹	7000	5000	3800	3000	2600
Spare live centres	1241725	1243613	1241722	1241721	1241728