

Lubritool



APPLICATION

For automated and manual maintenance of RÖHM clamping sets.

TYPE


HSK-A for tool shafts A.

CUSTOMER BENEFITS

- Optimal lubrication – always the ideal lubricant, just at the right time, in the right quantity and place
- No manual intervention needed – no failure to carry out maintenance
- Reduced maintenance times – 5 seconds rather than 5 minutes
- Compact design for more work space within the machine

TECHNICAL FEATURES

- Manifold ring for optimal distribution of the lubricant at the clamping set

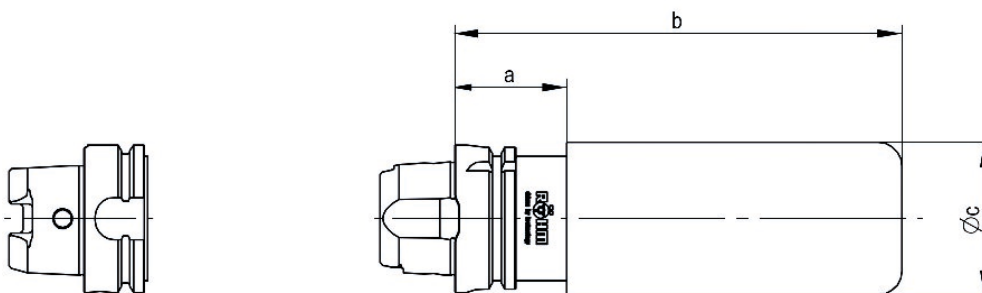

C 15 Lubritool® lubrication device

Item no.	1334394 ▲	1330233	1323415	1334306 ▲
Interface design (ISO12164-1)	HSK-A40	HSK-A63	HSK-A100	HSK-A50
a mm	45	48	51	51
b mm	188,6	191,5	194	194,5
Ø C mm	65	65	65	65
Weigth kg (without cartridge)	1	1,6	2,7	1
Weigth kg (with cartridge)	1,2	1,8	2,9	1,2
Lubrication applications (cycles)	100	100	100	100
Item No. Lubriflux grease cartridge (1 piece)	1339629	1339629	13349629	1339629

Lubritool® is approved for all clamping sets from RÖHM and OTT-JAJOB.
For deliveries to countries outside the EU: please contact RÖHM sales department.